



WINDMERE™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH REVEAL IMAGING®

FLOOR
& WALL



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

WINDMERE™

An impeccable blend of smooth concrete and weathered stone, Windmere by American Olean® modernizes a traditional look to create a minimalist design. Enjoy simplicity with an essence of sophistication, expanding your scope of design with a full assortment of floor and wall sizes. A soothing, monochromatic color palette finishes the look, making Windmere the ideal choice for versatility.



Cover photo features Windmere English Grey 18 x 18 on the floor and Scottish White 4 x 12 on the wall. Above photo features Windmere Irish Brown 12 x 24 on the floor and Scottish White 10 x 14, 2 x 2 mosaic and Jolly trim on the back wall with 2 x 2 mosaic on the sink wall.

WINDMERE™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH
REVEAL IMAGING®

FLOOR TILE



SCOTTISH WHITE WI01



ENGLISH GREY WI03



IRISH BROWN WI02

WALL TILE



SCOTTISH WHITE WI01



ENGLISH GREY WI03




IRISH BROWN WI02

MOSAIC



SCOTTISH WHITE WI01

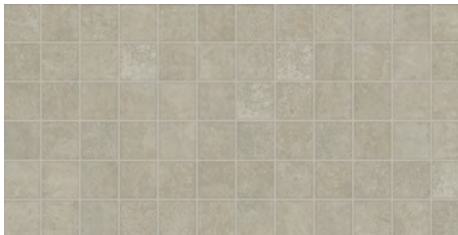

ENGLISH GREY WI03



IRISH BROWN WI02

JOLLY TRIM



SCOTTISH WHITE WI01



ENGLISH GREY WI03









IRISH BROWN WI02







WINDMERE™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH REVEAL IMAGING®

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	18 x 18 Floor Tile	17-1/2" x 17-1/2" (44.45 cm x 44.45 cm)	5/16"	17.04	8
	12 x 24 Floor Tile	11-9/16" x 23-3/8" (29.40 cm x 59.30 cm)	3/8"	15.04	8
	12 x 12 Floor Tile	11-13/16" x 11-13/16" (30.00 cm x 30.00 cm)	5/16"	14.55	15
	10 x 14 Wall Tile	9-13/16" x 13-15/16" (24.99 cm x 35.40 cm)	5/16"	14.25	15
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	10.64	28
	2 x 2 Mosaic ■	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P-43C9	22
	Wall Bullnose (10" side)	3 x 10	S-4310	54
	Wall Bullnose Corner	3 x 3	SN-4310	32
	Quarter Round	1 x 6	A-106	152
	Quarter Round Corner	1 x 1	UC-106	40
	Jolly	1/2 x 12	SI/212J	12

■ Dot-mounted

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

Wall: (10 x 14) 1/16"
(4 x 12) 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

Mosaic: 1/8"

RELATIVE PRICING: Low to Medium

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	WALL RESULT	MOSAIC RESULT
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs.	120-230 lbs.	> 250 lbs.
Scratch Hardness	MOHS	7.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant
Abrasion Resistance	C1027	3	N/A	3

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●*
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●*
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application
** Mosaic tile only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors. Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.



POST-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.



PRE-CONSUMER
RECYCLED MATERIALS



REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2018 AMERICAN OLEAN (02/18)



AMERICAN OLEAN®
PROVEN IN TILE™