

Setting Materials



PREMIERE TILE PRICE LIST

01

Effective March 15, 2019

Email orders to:

ordersdothan@premieretile.com
orderscolumbus@premieretile.com

Fax orders to:

Dothan: 334-702-1982
Columbus: 706-323-1840

Visit websites;

www.premieretile.com
www.bostik.com
www.dritac.com
www.schluter.com

230 Ross Clark Circle
Dothan, AL 36303
334-794-2585
800-804-9644
334-702-1982 (fax)

6151 Gateway Road
Columbus, GA 31909
706-327-0668
800-424-5298
706-323-1840 (fax)

TABLE OF CONTENTS

PRODUCT	PAGE	DESCRIPTION
CROSSOVER CHART	4	Suggested crossover grout colors Tec- Bostik
THINSETS AND MORTARS		
REFLEX	5	Ultra-Premium Polymer-Modified Thinset Mortar
SCHLUTER ALL-SET	6	Specialized Modified Thinset
BIG TILE & STONE	7	Polymer-Modified Large & Heavy Tile Mortar
LARGE FORMAT FLOOR	8	Mortar for Large Format Tile
BOSTIK PM	9	Multi-Purpose Polymer-Modified Thinset Mortar
PORCELAIN-MATE	10	Polymer-Modified Portland Cement Thin-set Mortar
DITRA-SET	11	Unmodified Thinset
SINGLE-FLEX FS	12	Fast setting multi-purpose polymer-modified thinset
SCHLUTER FAST-SET	13	Fast setting modified thinset
SCHLUTER SET	14	Unmodified Thinset
STONEWALL	15	High Performance and Non-Sag Mortar
GLASS-MATE	16	Glass Tile Mortar
MUD-IN-A-BAG	17	Floor Mud
SURFACE PREPARATION PRODUCTS		
WEBCRETE	18	Floor Patch
ULTRA FINISH PRO	19	Portland cement repair patch/Skimcoat
UNIVERSAL PRIMER PRO	20	Universal Primer
SL-100	21	Self Leveling Underlayment
SL-175	22	Self-Leveling Underlayment & wear layer
ULTRARAMP	23	Fast-setting ramping patch
GROUTS, CAULKS, COLORANTS, AND CLEANERS		
HYDROMENT CERAMIC SANDED GROUT	24	Sanded grout
HYDROMENT DRY TILE UNSANDED GROUT	25	unsanded grout
HYDROMENT VIVID	26	Rapid Curing High performance grout
TRUCOLOR GROUT	27	Pre-Mixed Grout
DIMENSION GROUT	27	Reflective, Pre-mixed Urethane Grout
BLAZE	27	Urethane Grout Haze Remover
TUB & TILE CAULK	28	Sanded/unsanded caulk
GROUT COLORANT	29	Grout Sealer and Colorant
EPOXYS		
EZPOXY EZCLEAN	30	100% solids epoxy mortar & grout
ADMIXTURES		
1900 ADMIXTURE	31	Epoxy Modified Grout and Mortar Admixture
425 ADMIXTURE	32	Multi-Purpose Admixture
MASTICS		
MULTI-PURPOSE	33	Floor & Wall mastic
D-2001 MASTIC	34	Superior Performance Ceramic Tile Mastic
WATERPROOFING		
GOLDPLUS	35	Latex waterproofing & anti-fracture membrane
SOUND REDUCTION		
BOSTI-SET	36	Thin porcelain tile panel adhesive and sound reduction membrane
WOOD ADHESIVES AND TOOLS		
PRO-CURE	37	Moisture-cure urethane adhesive
GREENFORCE	38	Advanced Tri-Linking adhesive & moisture control membrane
PRO-MSP	39	Hardwood and bamboo adhesive and moisture control membrane
PTG-8030	40	Resilient Flooring Adhesive
DRITAC 6200	41	Pressure Sensitive Wood Flooring Adhesive
DRITAC 9100	41	Contractor's Choice High Solids Wood Flooring Adhesive
DRITAC 7300	41	Urethane Wood Flooring Adhesive

TABLE OF CONTENTS

PRODUCT	PAGE	DESCRIPTION
DRITAC 7400	41	Urethane Wood Flooring Adhesive
DRITAC MCS7000	42	Moisture Control System
WOOD TROWELS	43	Wood Trowels
WOOD ADHESIVE CLEANER/REPAIR KITS	43	Urethane Adhesive Cleaners and Repair Kits

SUGGESTED CROSSOVER GROUT COLORS TEC TO BOSTIK


<u>TEC</u>	<u>BOSTIK</u>	<u>Additional Bostik Colors</u>	
Almond	Champagne	Brick	Silver Bullet
Antique White	Alpine White	Clay	Steel
Birch	Mobe Pearl	Heron Blue	Summer Wheat
Bright White	White	Kahlua Cream	
Charcoal Gray	French Gray		
Coffee	Sand Beige		
Cornsilk	Peaches & Cream		
Dark Walnut	Flash Walnut		
Delorean Gray	Delorean Gray		
Dove Gray	Lunar		
Espresso	Flash Walnut		
Ivory	Classic Bone		
Light Buff	Portabella		
Light Chocolate	Jamoca		
Light Pewter	Shadow		
Light Smoke	Antique White		
Mist	Misty Gray		
Mocha	Latte		
Parchment	Linen		
Pearl	Alabaster		
Praline	Classic Bone		
Raven	Charcoal Black		
Sable	Taupe		
Sand	Almond		
Sandstone Beige	Almond		
Silhouette	Taupe		
Silverado	Storm		
Standard Gray	Natural		
Standard White	Bright		
Sterling	Buff		
Summer Wheat	Timber		
Warm Taupe	Cashmere		

REFLEX®

Ultra-Premium Polymer-Modified Thin Set Mortar

Bostik Reflex® Ultra-Premium Polymer-Modified Thin Set Mortar is for interior or exterior installations to set all types of tiles, and has excellent mixing and application properties.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
White	50#	48	\$54.15	\$36.09



Where to Use

- Interior/exterior floors
- Interior/exterior walls
- Interior/exterior countertops

Substrates

- Concrete
- Structurally-sound, exterior grade plywood (interior/dry use only)
- Cementitious backer board
- Bostik Ultra-Set® Advanced
- Bostik Black-Top™
- Bostik GoldPlus™
- Existing, well-bonded vinyl/NT or ceramic tile
- Cutback adhesive residue (dry only)

For Installation of:

- Porcelain
- Saltillo
- Ceramic
- Glass
- Granite
- Slate
- Marble
- Limestone
- Thin porcelain tiles
- Large porcelain panels
- Dimensional stone tiles
- For interior & exterior use on vertical & horizontal surfaces
- Exceeds ANSI A118.4 & A118.11
- Excellent working characteristics

3/16 x 5/32 V-Notch trowel	Coverage: 85-100 s/f
1/4 x 1/4 Square-Notch trowel	Coverage: 70-80 s/f
1/4 x 3/8 Square-Notch trowel	Coverage: 50-60 s/f
1/2 x 1/2 Square-Notch trowel	Coverage: 30-35 s/f

Schluter ALL-SET™

SPECIALIZED MODIFIED THIN-SET MORTAR

Schluter ALL-SET™ is a specialized, modified thin-set mortar for use as a bond coat within tile assemblies that is optimized for use with Schluter® membranes and boards. Schluter ALL-SET™ is smooth and creamy, as well as easy to handle and spread. It is sag-resistant and ideal for setting tile on both horizontal and vertical surfaces.

Schluter ALL-SET™ meets or exceeds the American National Standard Specifications for Modified Dry-Set Cement Mortar, ANSI A118.4T, the American National Standard Specifications for Improved Modified Dry-Set Cement Mortar, ANSI A118.15T, and the

American National Standard Specifications for Exterior Glue Plywood Latex-Portland Cement Mortar, A118.11.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
White	50#	56	\$38.75	\$27.99

Where to use:

Interior/Exterior

Substrates:

DITRA® over:

Plywood/OSB

Concrete

Gypsum

KERDI® over:

Gypsum Board

Cement Backerboard

Fiber-Cement Board

Portland Cement Mortar

KERDI®-SHOWER prefabricated substrates

Materials:

TILE over DITRA® & KERDI® products

Ceramic

Porcelain

Natural stone (e.g., granite, marble, etc.)

Large or Heavy Tile



Coverage Chart			
Membrane to Substrate:			
DITRA-TROWEL™	DITRA-HEAT/-XL-TROWEL™		KERDI-TROWEL™
11/64"x11/64"	1/4"x1/4"		1/8"x1/8"
150sf	100sf		200sf
Tile to Membrane:			
Trowel	DITRA®/DITRA-HEAT™	DITRA-XL™	KERDI®/KERDI-BOARD™
1/4"x1/4"	60-70sf	45-55sf	90-100sf
1/4"x3/8"	40-50sf	35-45sf	55-65sf
1/2"x1/2"	30-40sf	25-35sf	40-50sf
3/4"	25-35sf	20-30sf	30-40sf

BIG TILE & STONE™

Polymer-Modified Large & Heavy Tile Mortar

Bostik Big Tile & Stone™ is a polymer-modified, large and heavy tile mortar used for interior or exterior installations to set large format tiles, and can also be used for vertical applications.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
Gray	50#	48	\$31.35	\$20.89
White	50#	48	\$35.39	\$23.59

Where to Use

- Interior and exterior floors
- Interior and exterior walls
- Interior and exterior countertops

Substrates

- Concrete
- Exterior grade plywood (interior/dry use only)
- Cementitious backer board
- Bostik Ultra-Set® Advanced
- Bostik Black-Top™
- Bostik GoldPlus™
- Existing, well-bonded vinyl composition tile (VCT) or ceramic tile



For Installation of:

- Ceramic
- Porcelain
- Granite
- Slate
- Marble
- Limestone
- Thin porcelain tiles
- Large porcelain panels
- Dimensional stone tiles
- For interior or exterior installations
- For large and heavy tile installations
- Used to set all large sized ceramic, porcelain, granite, slate, marble, limestone and dimensional stone tiles

3/16 x 5/32 V-Notch trowel	Coverage: 85-100 s/f
1/4 x 1/4 Square-Notch trowel	Coverage: 70-80 s/f
1/4 x 3/8 Square-Notch trowel	Coverage: 50-60 s/f
1/2 x 1/2 Square-Notch trowel	Coverage: 30-35 s/f

Bostik Large Format Floor™

Polymer-Modified Mortar for Large Format Tile

Bostik Large Format Floor™ is a polymer-modified mortar designed for floor installations of large format ceramic tiles, porcelain tiles, natural stone, granite, slate and marble. Use over properly prepared, structurally sound-concrete, exterior grade plywood (interior/dry use only); cementitious backer board and existing ceramic tile.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.	PALLET
Gray	50#	48	\$22.79	\$15.19	\$12.89
White	50#	48	\$25.05	\$16.69	\$13.99

WHERE TO USE

Interior/exterior floors.



FOR INSTALLATION OF:

Ceramic Tiles
Porcelain Tiles
Natural Stone
Granite
Slate
Marble

1/4 x 3/8 Square-Notch trowel	Coverage: 50-60 s/f
1/2 x 1/2 Square-Notch trowel	Coverage: 30-35 s/f
Euro Notch	Coverage: 30-35 s/f
3/4 x 9/16 x 3/8 Slanted Layover	Coverage: 30-35 s/f

BOSTIK PM™

Multi-Purpose Polymer-Modified Thin Set Mortar

Bostik PM™ multi-purpose polymer-modified thin set mortar is for interior & exterior installations to set a variety of tiles on vertical & horizontal surfaces.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.	WHSL/ PLT
Gray	50#	48	\$20.25	\$13.49	\$11.49
White	50#	48	\$23.09	\$15.39	\$12.99

Where to Use

- Interior and exterior floors
- Interior and exterior walls

Substrates

- Concrete
 - Exterior grade plywood (interior/dry use only)
 - Cementitious backer board
- Bostik Ultra-Set® Advanced
 - Bostik Black-Top™
 - Bostik GoldPlus™
- Existing, well-bonded vinyl composition tile (VCT) or ceramic tile



For Installation of:

- Ceramic
- Porcelain
- Granite
- Slate
- Marble
- Limestone
- Dimensional stone tiles

3/16 x 5/32 V-Notch trowel	Coverage: 85-100 s/f
1/4 x 1/4 Square-Notch trowel	Coverage: 70-80 s/f
1/4 x 3/8 Square-Notch trowel	Coverage: 50-60 s/f
1/2 x 1/2 Square-Notch trowel	Coverage: 30-35 s/f

Porcelain-Mate™

Polymer-Modified Portland Cement Thin Set Mortar

Bostik Porcelain-Mate® polymer-modified Portland cement thin set mortar is for interior and exterior installations of many types of tiles, and offers excellent working characteristics.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.	PALLET
white	50#	48	\$21.59	\$14.39	\$12.29
gray (non-stock)	50#	48	\$19.05	\$12.69	\$10.79

Where to Use

Interior and exterior floors
Interior and exterior countertops

Substrates

Concrete
Cement backer boards
Cured mortar beds
Brick
Cement block
Bostik GoldPlus™



For Installation of:

Ceramic
Porcelain
Granite
Slate
Marble
Limestone
Dimensional stone

3/16 x 5/32 V-Notch trowel	Coverage: 85-100 s/f
1/4 x 1/4 Square-Notch trowel	Coverage: 70-80 s/f
1/4 x 3/8 Square-Notch trowel	Coverage: 50-60 s/f
1/2 x 1/2 Square-Notch trowel	Coverage: 30-35 s/f

DITRA-SET™

Portland Cement Thin Set and Large and Heavy Tile Mortar for Schluter®-Ditra® and Schluter®-Kerdi Uncoupling and Waterproofing Membranes

Bostik Ditra-Set™ Portland cement thin set large and heavy tile mortar for Schluter®-Ditra® and Schluter®-Kerdi uncoupling and waterproofing membranes provides outstanding workability, excellent durability, significant leveling characteristics, and superior bond strengths in interior and exterior applications.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.	PLT
White	50#	48	\$25.49	\$16.99	\$14.39
Gray	50#	48	\$23.09	\$15.39	\$12.99

Where to Use


- Interior
- Exterior

Substrates

- Plywood
- Drywall
- Cement backer board
- Concrete
- Masonry
- Schluter® Ditra®
- Schluter® Kerdi®

Materials

- Ceramic
- Porcelain
- Stone
- For interior or exterior installations in conjunction with Schluter®-DITRA® and Schluter®-KERDI® uncoupling and waterproofing membranes
- Exceeds ANSI A 118.1 when mixed with water
- Recommended for use with porcelain and large format tiles over uncoupling membranes



Ditra or Kerdi to substrate	1/4 x 3/16 trowel	Coverage: 150 -200 s/f
To bond tile to Ditra	1/4 x 3/8 trowel	Coverage: 40-50 s/f
to bond tile to Kerdi	1/4 x 3/8 trowel	Coverage: 50-60 s/f
> 12x12 Ceramic Tiles	1/2 x 1/2 trowel	Coverage: 30-40 s/f

Single-Flex® FS

Fast Setting Premium Multi-Purpose Polymer-Modified Thin Set Mortar

Bostik Single-Flex® FS Fast Setting Premium Multi-Purpose Polymer-Modified Thin Set Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
White	50#	48	\$52.79	\$35.19

WHERE TO USE

Interior/exterior floors, walls and countertops



Substrates

- Concrete
- Structurally-sound, exterior grade plywood (interior/dry use only)
- Cementitious backer board
- Bostik Ultra-Set® Advanced
- Bostik Black-Top™
- Bostik GoldPlus™
- Existing, well-bonded vinyl (VCT) or ceramic tile

For Installation of:

- Porcelain
- Ceramic
- Granite
- Slate
- Marble
- Limestone
- Dimensional stone tiles

3/16 x 5/32 V-Notch trowel	Coverage: 85-100 s/f
1/4 x 1/4 Square-Notch trowel	Coverage: 70-80 s/f
1/4 x 3/8 Square-Notch trowel	Coverage: 50-60 s/f
1/2 x 1/2 Square-Notch trowel	Coverage: 30-35 s/f

Schluter FAST-SET™

Rapid Setting Modified Thinset

Schluter FAST-SET™ is a specialized rapid-setting modified thin-set mortar specifically formulated for use with Schluter® membranes and boards. Fast-set is ready for grout in 4 hours for fast-track projects. It is sag-resistant and ideal for setting tile on both horizontal and vertical surfaces. Schluter FAST-SET™ is suitable for use with ceramic, porcelain, and stone tile, including large and heavy tile, in conjunction with Schluter®-Systems' uncoupling and waterproofing membranes (e.g., DITRA, DITRA-HEAT, KERDI, etc.), the Schluter®-Shower System, and KERDI-BOARD.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
White	50#	56	\$80.85	\$52.55
Grey	50#	56	\$74.55	\$48.45

Where to use:

Interior

Exterior

Substrates:

DITRA® over:

Concrete

Gypsum

Plywood/OSB

Vinyl Flooring

KERDI® over:

Gypsum Board

Cement Backerboard

Fiber-Cement Board

Portland Cement Mortar

KERDI®-SHOWER prefabricated substrates

Materials:

TILE over DITRA® & KERDI® products

Ceramic

Porcelain

Natural stone (e.g., granite, marble, etc.)



Coverage Chart

Membrane to Substrate:

DITRA-TROWEL™	DITRA-HEAT/-XL-TROWEL™	KERDI-TROWEL™
11/64"x11/64"	1/4"x1/4"	1/8"x1/8"
150sf	100sf	200sf

Tile to Membrane:

Trowel	DITRA®/DITRA-HEAT™	DITRA-XL™	KERDI®/KERDI-BOARD™
1/4"x1/4"	60-70sf	45-55sf	90-100sf
1/4"x3/8"	40-50sf	35-45sf	55-65sf
1/2"x1/2"	30-40sf	25-35sf	40-50sf
3/4"	25-35sf	20-30sf	30-40sf

SCHLUTER SET™

UNMODIFIED THIN-SET MORTAR

Schluter SET™ is a premium, unmodified thin-set mortar for use as a bond coat within tile assemblies that is optimized for use with Schluter® membranes and boards. Schluter SET™ is smooth and creamy, as well as easy to handle and spread. It is sag-resistant and ideal for setting tile on both horizontal and vertical surfaces. Schluter SET™ meets or exceeds the American National Standard Specifications for Dry-Set Cement Mortar, ANSI A118.1T.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
White	50#	56	\$23.09	\$16.79

Where to use:

Interior

Exterior

Substrates:

DITRA® over:

Concrete

Gypsum

KERDI® over:

Gypsum Board

Cement Backerboard

Fiber-Cement Board

Portland Cement Mortar

KERDI®-SHOWER prefabricated substrates

Materials:

TILE over DITRA® & KERDI® products

Ceramic

Porcelain

Natural stone (e.g., granite, marble, etc.)

Large or Heavy Tile



Coverage Chart			
Membrane to Substrate:			
DITRA-TROWEL™	DITRA-HEAT/-XL-TROWEL™	KERDI-TROWEL™	
11/64"x11/64"	1/4"x1/4"	1/8"x1/8"	
150sf	100sf	200sf	
Tile to Membrane:			
Trowel	DITRA®/DITRA-HEAT™	DITRA-XL™	KERDI®/KERDI-BOARD™
1/4"x1/4"	60-70sf	45-55sf	90-100sf
1/4"x3/8"	40-50sf	35-45sf	55-65sf
1/2"x1/2"	30-40sf	25-35sf	40-50sf
3/4"	25-35sf	20-30sf	30-40sf

STONEWALL™

High Performance and Non-Sag Mortar

Bostik StoneWall™ is for interior or exterior, commercial or residential installations to set all types of porcelain, saltillo, ceramic, granite, slate, marble, limestone and dimensional stone tiles. StoneWall™ is formulated to prevent large bodied ceramic, porcelain and stone tiles from slipping in vertical applications. Bostik StoneWall™ is also suitable for installing floor tiles.

SIZE	RETAIL	WHOLESALE
50# Bag	\$56.09	\$37.39



Where to Use

Commercial and residential interior/exterior horizontal applications

Commercial and residential interior/exterior vertical applications

Substrates

Concrete

Structurally-sound, exterior grade plywood (interior/dry use only)

Cementitious backer board

Bostik Ultra-Set® Advanced

Bostik Black-Top™

Bostik GoldPlus™

Existing, well-bonded vinyl composition tile (VCT) or ceramic tile

Cutback adhesive residue (dry only)

Materials

Porcelain

Saltillo

Ceramic

Granite

Slate

Marble

Limestone

Dimensional stone tiles

Coverage Chart	
3/16" X 5/32" V-Notch	Coverage 85-100 ft ²
1/4" X 1/4" Square-Notch	Coverage 70-80 ft ²
1/4" X 3/8" Square-Notch	Coverage 50-60 ft ²
1/2" X 1/2" Square-Notch	Coverage 30-35 ft ²

GLASS-MATE™

Glass Tile Mortar

Bostik Glass-Mate™ is a premium, polymer-modified, thinset mortar that exhibits superior bond strength, durability, nonsag properties and workability. Its bright white color and high polymer content make it ideal for setting individual glass tiles, sheet mounted glass tile and most types of tile or natural stone in thinset applications over a variety of substrates.

SIZE	RETAIL	WHOLESALE
25# Bag	\$41.99	\$27.99

Where to Use

Residential and commercial interior/exterior floors

Residential and commercial interior/exterior walls

Residential and commercial interior/exterior countertops

Substrates

When mixed with water:

Concrete (dry, cured at least 28 days)

Cement block, brick, cement mortar beds, self-leveling underlayments

Gypsum wallboard and plaster (interior walls in dry areas only)

Cementitious backer board (see manufacturer's installation guidelines)

Bostik GoldPlus™

Ultra-Set® Advanced

Bostik Black-Top™

When mixed with Bostik 425™ Multi-Purpose Acrylic Latex Admixture:

Concrete (dry, cured at least 28 days)

Cement block, brick, cement mortar beds, self-leveling underlayments

Gypsum wallboard and plaster (interior walls in dry areas only)

Cementitious backer board (see manufacturer's installation guidelines)

Bostik GoldPlus™

Ultra-Set® Advanced

Bostik Black-Top™

Structurally-sound APA and CANPLY Group 1 exterior grade plywood (interior, residential and light commercial in dr

Existing, well-bonded, properly prepared ceramic or porcelain tile, cement terrazzo, quarry tile, pavers and natural s

Materials

Sheet mounted mosaics (glass, ceramic, porcelain, or stone)

Individual glass tiles up to 6" x 6" (15 cm x 15 cm) or 36 square inches of:

Glass

Ceramic

Porcelain

Most natural stone

Pavers

Quarry

Saltillo

Most marble

Most granite



Coverage Chart	
3/16" X 5/32" V-Notch	Coverage 85-100 ft2
1/4" X 1/4" Square-Notch	Coverage 70-80 ft2
1/4" X 3/8" Square-Notch	Coverage 50-60 ft2
1/2" X 1/2" Square-Notch	Coverage 30-35 ft2

MUD-IN-A-BAG™


Pre-Blended Floor Mud

Bostik Mud-In-A-Bag™ is a pre-blended floor mud mixture of 4 parts sand to 1 part Portland cement for use in mortar beds from 3/4" to 4" thick.

COLOR	UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.	WHSL/ PLT
gray	50#	48	\$12.59	\$8.39	\$7.09

Where to Use

- Floors
 - Countertops
 - Showers
- Tubs
- Fountains
 - Spas
 - Decks
- Concrete
 - Plywood
 - Cleavage membranes
- For mud bed or wet set installations
- For use from 3/4 inch to 4 inches
- Reduces labor costs



COVERAGE (per 50 lb bag)	
3/4 " thick	8 s/f
1 1/2" thick	4.5 s/f

*Coverage rates are approximate & actual coverage will vary based on application technique, waste, and/or other jobsite conditions.


WEBCRETE® 95

Fast-Setting, High Strength, Floor Patch

Bostik Webcrete® 95 is a fast-setting, polymer-modified, Portland cement patch for interior use on floors and walls. This product may be used to skim-coat or featheredge finish up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When mixed with Bostik 425™ Multi-purpose Acrylic Latex Admixture instead of water, not only is the performance and flexibility improved, but Bostik Webcrete 95® can also be used as an embossing leveler.

UNIT/WT	UNITS/ PALLET	RETAIL	WHLS. 1-10 Bags	11 + Bags
25#	96	\$23.09	\$15.39	\$13.09

- Excellent skim-coating, patching & leveling
- Featheredge finish
- Apply up to 1/2" depth in one application



COVERAGE (s/f)	
Thickness	25lb
1/8"	25-35
Skim Coat	625-750
Emboss Leveler	1250-1500

*coverage rates are approximate & actual coverage will vary based on application technique, waste, and/or other jobsite conditions.

UltraFinish™ Pro

Premium Portland Cement Repair Patch / Skimcoat

UltraFinish™ Pro is a cement-based, rapid drying, trowelable repair patch and skimcoat that is used to smooth subfloors prior to the installation of finished floor coverings. UltraFinish™ Pro allows for the installation of many floor coverings in as little as 15 minutes. It can be applied over properly prepared concrete, wood, cement-based terrazzo, VCT, ceramic, quarry tile, cutback and non-water soluble adhesive residue.

UNIT/WT	UNITS/ PALLET	RETAIL	Wholesale 1-23 bags	24+ bags
10#	48	\$28.49	\$18.99	\$16.49

PRODUCT FEATURES

- Wall patch application over cement backer units
- Bonds to a wide variety of substrates
- Accepts many floor coverings in as little as 15 minutes
- Tenacious adhesion
- Creamy, smooth workability
- Exceptional coverage
- Can be re-tempered without the addition of water
- Mold and mildew resistant
- Contributes points to LEED® certified projects
- 22% recycled content
- Applies from a skim coat to 1/2"



COVERAGE

1/8" covers 33 s/f. Up to 300 s/f applied at a skim coat (depending on substrate profile).

UNIVERSAL PRIMER™ PRO


Deep Penetrating Primer

Universal Primer™ Pro is a premium, one component, interior acrylic primer designed for use with Bostik's line of underlayments and patches. Universal Primer™ Pro's deep penetrating formulation can be used on a wide variety of substrates including concrete, wood, well bonded VCT, epoxy, tile, gypsum underlayment, cutback and other adhesive residues not affected by water.

Universal Primer™ Pro is rapid drying and will adhere to both porous and non-porous substrates.

UNIT/ WT	UNITS/ PALLET	RETAIL	WHSL.
1 gal	144	\$85.19	\$56.79

- Enables adhesion of self-leveling underlayments
- Low VOC, water-based formulation
- Rapid drying

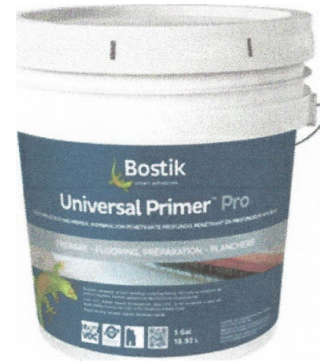

PRIMER APPLICATION CHART

Concrete Substrate	
Dilution Ratio	1 part Universal Primer™ Pro, 1 part water
Coverage	600-800 s/f per gallon of concentrate
Application	Dilute 1 Part Universal Primer Pro with 1 part, water and mix thoroughly. Pour out primer or spray liberally and disperse with a split tip broom to a thin film. Leave no bare spots or puddles. Broom out any excess primer if puddling occurs while drying. Allow the primer to dry before placing material. (Minimum 1 hour and Maximum 24 hours)
Wood Substrate (Engineered Subfloors)	
Dilution Ratio	Undiluted
Coverage	300-400 s/f per gallon of concentrate
Application	Apply Universal Primer Pro undiluted using a 3/8" nap roller to a thin film. Leave no bare spots and roll out any puddles or excess primer. Allow the primer to dry before placing material (Minimum 2 hours and Maximum 24 hours)
Non-Porous Substrates (Epoxy, Ceramic, Quarry Tile, VCT, Terrazzo)	
Dilution Ratio	Undiluted
Coverage	500 s/f per gallon of concentrate
Application	Apply Universal Primer Pro undiluted using a 3/8" nap roller to a thin film. Leave no bare spots and roll out any puddles or excess primer. Allow the primer to dry before placing material (Minimum 2 hours and Maximum 24 hours)
Highly Porous Substrates (Gypsum seeds, mortar beds, highly porous concrete)	
Dilution Ratio	1st Coat: 1 part Universal Primer Pro, 3 parts water
	2nd Coat: 1 part Universal Primer Pro, 1 part water
Coverage	1st Coat: 450-600 s/f per gallon of concentrate
	2nd Coat: 800 s/f per gallon of concentrate
Application	1st Coat: Dilute 1 part Universal Primer Pro primer with 3 parts water and mix thoroughly. Pump spray or pour out primer and disperse liberally with split tip broom to a thin film. Leave no bare spots and broom out any puddles or excess primer. Allow the 1st coat to dry before applying 2nd coat. (Minimum 1 hour) 2nd Part: Dilute 1 part Universal Primer Pro with 1 part water. Mix thoroughly and repeat application steps listed above, allow to dry before placing material. (Minimum 2 hours and Maximum 24 hours)


Note: Coverage can vary greatly on highly porous substrates.

SL-100™

Contractor-Grade Self-Leveling Underlayment

SL-100™ is a cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its extended working time, low shrinkage and superior leveling properties make it the ideal product for renovation and new construction projects where next day flooring installations are not critical.

UNIT/WT	UNITS/ PALLET	RETAIL	WHLS. 1-10 Bags	11 + Bags
50#	48	\$42.29	\$28.19	\$23.99



- Install from 1/4" to 3" neat
- Walkable in 2 to 3 hours
- Install floor covering in 1 to 3 days

COVERAGE CHART (Units represent quantity of 50 lb bags)

S/F	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/2"	2"
100 s/f	4	6	8	10	12	14	16	24	32
500 s/f	20	30	40	50	60	70	80	120	160
1000 s/f	40	60	80	100	120	140	160	240	320
2000 s/f	80	120	160	200	240	280	320	480	640
3000 s/f	120	180	240	300	360	420	480	720	960
4000 s/f	160	240	320	400	480	560	640	960	1280
5000 s/f	200	300	400	500	600	700	800	1200	1600
10,000 s/f	400	600	800	1000	1200	1400	1600	2400	3200

SL-175™

Premium Self-Leveling Underlayment & Wear Layer

SL-175™ is a premium, cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. It's long working time, low shrinkage and superior leveling properties make it the ideal product for demanding applications on, above or below grade. SL-175™ is also a durable wear layer when a natural concrete look is desired. Topical stains, dyes and surface treatments further expand the decorative possibilities.

UNIT/WT	UNITS/ PALLET	RETAIL	WHLS. 1-10 Bags	11 + Bags
50#	48	\$66.29	\$44.19	\$37.59

- Install from 1/8" to 2" neat
- Walkable in 1 to 2 hours
- Install floor covering in 6 to 16 hrs



COVERAGE CHART (Units represent quantity of 50 lb bags)

S/F	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/2"	2"
100 s/f	4	6	8	10	12	14	16	24	32
500 s/f	20	30	40	50	60	70	80	120	160
1000 s/f	40	60	80	100	120	140	160	240	320
2000 s/f	80	120	160	200	240	280	320	480	640
3000 s/f	120	180	240	300	360	420	480	720	960
4000 s/f	160	240	320	400	480	560	640	960	1280
5000 s/f	200	300	400	500	600	700	800	1200	1600
10,000 s/f	400	600	800	1000	1200	1400	1600	2400	3200

UltraRamp™

PREMIUM PORTLAND CEMENT RAMPING PATCH

UltraRamp™ is a rapid setting, cement-based, ramping patch with excellent workability that makes screeding, ramping or patching fast and easy. UltraRamp™ can be used over concrete, terrazzo, ceramic or quarry tile, epoxy moisture vapor coatings, non-water soluble adhesive residue and approved wood subfloors.

UNIT/WT	UNITS/ PALLET	RETAIL	Wholesale	Pallet
50#	48	\$58.93	\$39.29	\$33.39

KEY FEATURES – Applies from a skimcoat to 2" neat; 5" properly extended – Install flooring in as little as one hour – Ideal for screeding, ramping, patching & heavy skimcoating

RAMPING APPLICATION PRODUCT CALCULATION

- 1.** Determine average thickness of ramp. For example if you are going from a feather-edge (0") to 1" the average thickness is 1/2" (add the minimum thickness to the maximum thickness. Divide by 2 which gives you the average thickness).
- 2.** Determine square footage which is the width of the ramp multiplied by length of ramp.
- 3.** Divide the square footage by the average thickness amount listed below:
1/8" Average: Divide by 50
1" Average: Divide by 6
1/4" Average: Divide by 25
1-1/2" Average: Divide by 4.5
1/2" Average: Divide by 12
2" Average: Divide by 3

Hydroment® Ceramic Tile Grout™ SANDED

For Use in Grout Joints From 1/8" to 1 1/2"

Bostik Hydroment® Ceramic Tile Grout™ (Sanded) is a proven blend of carefully graded quartz aggregates, Portland cement, colorfast pigments and other special proprietary ingredients. It provides superior hardness, consistent, uniform color, strength and durability with a wide variety of tiles

UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
25#	96	\$23.39	\$15.59

Where to Use

Interior/exterior floors
Interior/exterior walls
Interior/exterior ceilings

Materials

Ceramic tile
Ceramic mosaics
Porcelain
Quarry
Brick
Pavers
Slate
Granite
Cultured marble
Dimensional stone
Structural glazed tile



COVERAGE CHART — lbs. per 100 sq. ft.				
Tile Size	1/8"	1/4"	3/8"	1/2"
1" x 1" x 1/4"	60	105	-	-
2" x 1" x 1/4"	47	84	-	-
2" x 2" x 1/4"	33	60	-	-
3" x 3" x 1/4"	23	43	60	77
4" x 4" x 1/4"	17	33	47	60
4" x 4" x 3/4"	26	50	70	90
4" x 4" x 1/2"	34	66	95	122
4" x 8" x 3/8"	20	38	55	70

Grout calculator available at www.bostik-us.com

Hydroment® Dry Tile Grout™ UNSANDED

For use in grout joints up to 1/8"

Bostik Hydroment® Dry Tile Grout™ (Unsanded) is formulated from select grades of ground quartz, Portland cement, colorfast pigments and other special proprietary ingredients. It provides superior hardness, consistent, uniform color, strength, and durability with a wide variety of tiles.

UNIT/WT	RETAIL	WHSL.
5#	\$14.99	\$9.99

Where to Use

Floors when joint widths are less than 1/8"

Walls when joint widths are less than 1/8"

Materials

Glazed wall tile


Marble

Granite

Ceramic

Porcelain

Glass

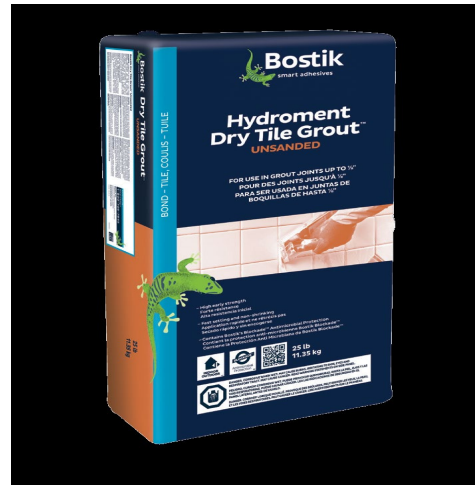

COVERAGE CHART — lbs. per 100 sq. ft.		
Tile Size	1/16"	1/8"
1" x 1" x 1/4"	29	57
2" x 1" x 1/4"	22	43
2" x 2" x 1/4"	15	29
3" x 3" x 1/4"	10	20
4" x 4" x 1/4"	8	15
4 1/4" x 4 1/4" x 1/4"	7	14
4" x 4" x 3/8"	11	22
4" x 4" x 1/2"	15	30
4" x 8" x 3/8"	9	17
4" x 8" x 1/2"	11	22
4" x 8" x 1 1/8"	26	50
6" x 6" x 3/8"	8	15
6" x 6" x 1/2"	10	20
6" x 6" x 3/4"	15	30
8" x 8" x 3/8"	6	11
8" x 8" x 1/2"	8	15
10" x 10" x 3/8"	4	9
12" x 12" x 3/4"	8	15
12" x 12" x 1/2"	5	10
16" x 16" x 1/2"	4	8
18" x 18" x 3/8"	3	5
18" x 18" x 1/2"	3	7
24" x 24" x 1/2"	3	5
24" x 24" x 3/8"	2	3

Grout calculator available at www.bostik-us.com

Hydroment® Vivid™

Rapid Curing High Performance Grout

Bostik Hydroment® Vivid™ is a rapid curing, premium grade, stain resistant cementitious grout for demanding commercial and residential projects. It offers consistent color technology with enhanced stain and efflorescence protection.

UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
25#	48	\$52.19	\$34.79



Where to Use

Residential and commercial interior/exterior floors in dry to intermittent wet or submerged applications
 Residential and commercial interior/exterior walls in dry to intermittent wet or submerged applications

Materials

Ceramic tile
 Ceramic mosaics
 Porcelain
 Quarry tile
 Brick
 Pavers
 Slate
 Granite

COVERAGE CHART (FT²)

Tile Size (inches)	Grout Joint Size (inches)							
	9 lb.				25 lb.			
	1/8	1/4	3/8	1/2	1/8	1/4	3/8	1/2
1 x 1 x 1/4	20	11	8	6	55	30	21	17
2 x 1 x 1/4	26	14	9	7	72	38	26	21
2 x 2 x 1/4	38	20	14	11	107	55	38	30
3 x 3 x 5/16	46	23	16	12	127	65	44	34
3 x 6 x 1/4	75	38	26	20	210	106	72	55
4 1/4 x 4 1/4 x 1/4	80	41	28	21	223	113	77	58
4 x 8 x 3/8	67	34	23	17	186	94	63	48
6 x 6 x 1/4	113	57	38	29	313	158	107	81
8 x 8 x 3/8	100	50	34	26	278	140	94	71
12 x 12 x 3/8	150	75	50	38	415	209	140	106
6 x 24 x 3/8	120	60	40	30	332	167	112	84
16 x 16 x 3/8	199	100	67	50	563	278	186	140
18 x 18 x 3/8	224	112	75	57	622	312	209	157
24 x 24 x 3/8	298	150	100	75	829	415	278	209

Average coverage per container – coverage will vary based on tile size, joint width and depth.

TRUCOLOR PRE-MIXED GROUT

TruColor Pre-Mixed Grout is a patented, water-based, urethane grout offering the ultimate in color accuracy, stain protection and crack resistance for residential and commercial tile installations. This breakthrough formulation installs up to 50 faster than traditional grouts, and never needs to be sealed. Its perfect balance of flexibility and toughness enables it to exhibit unmatched performance and crack resistance. TruColor exceeds the grout-relevant portion of the ANSI 118.3 epoxy standard (modified ANSI 118.3 UG).

SIZE	RETAIL	WHOLESALE
18 lb Pail	\$164.99	\$109.99
9 lb Pail	\$96.59	\$64.39

COLORS

Linen H163	Almond H153	Jamoca H162	French Gray H142	Delorean Gray H160	Kahlua Cream H143	Antique White H135	Classic Bone H158
Misty Gray H144	Alabaster H189	Sand Beige H148	Char Black H139	Natural H146	Latte H192	Summer Wheat H150	Mobe Pearl H145
Portabella H184	Shadow H195	Champagne H138	White H152	Flash Walnut H141			

DIMENSION Reflective, Pre-mixed Urethane Grout by Bostik

Bostik's Dimension is a patented, glass-filled, ready -to-use, water-based urethane grout. Dimension contains micro glass beads and a translucent urethane binder that both reflects light and allows light to pass through it and illuminate tiles directly. Adds a new dimension to ALL tile installations: ceramic, porcelain, glass, metal and natural stone tiles - on floors and walls, interior and exterior; never requires sealing; stain proof; chemical and mildew resistant; 3-hour working time; 30 to 50 faster than other grouts; UV stable; will not yellow or darken; will not fade, streak or shade - even when wet. See page 14 for coverage chart.

SIZE	RETAIL	WHOLESALE
*18 lb Pail	\$215.85	\$143.89
*9 lb Pail	\$124.05	\$82.69

COLORS

600 Diamond	610 Opal	620 Topaz	621 Amber
622 Aventurin	630 Palm Wood	640 Citrine	650 Jade
660 Aquamarin	670 Moonstone	671 Hematite	680 Onyx
700 Silver	710 Bronze	720 Copper	

*non-stocking Item. Special order. Allow 7-10 days for delivery.

Blaze - Urethane Cleaner

Urethane Grout Haze and general purpose cleaner. Blaze is designed to remove the haze that can remain after urethane grout installations. In 25% diluted form, it can double as an excellent routine tile floor cleaner. Works on Ceramic, Porcelain, Marble, Granite, Limestone, Travertine, Sandstone, Flagstone, Masonry, concrete, Metal, and Glass Tile. (12 bottles per case.)

SIZE	RETAIL	WHOLESALE	CASE
24 oz spray	\$22.19	\$14.79	\$12.59
Gallon	\$61.95	\$41.29	

Tub & Tile Caulk

Premium Sanded/Unsanded Caulk

Tub & Tile Caulk is siliconized acrylic caulk provides a flexible seal that bonds to most common household surfaces. Ideal for filling joints where tiles abut dissimilar surfaces. Tub and Tile Caulks match the color and texture of Bostik grout colors. Use around bathtub, showers, countertops, basins and many other areas. Meets or exceeds ASTM C834 standard specification for latex sealants

SANDED/UNSANDED CAULK			
UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
10.1 oz	6/case	\$11.99	\$7.99



APPROXIMATE COVERAGE CHART

Coverage for 10.1 fl. oz. (298 ml) Cartridge

Depth	Width							
	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
1/8"	99	49	33	24	20	16	14	12
1/4"		24	20	12	10	8	7	6
3/8"			11	8	6	5	5	4
1/2"				6	5	4	3	3

GROUT SEALER & COLORANT™

Bostik Grout Sealer & Colorant™ is ideal for changing or restoring your grout color. It may be applied to sanded and unsanded cement grout.

UNIT/WT	UNITS/CASE	RETAIL	WHSL.
8oz	6/case	\$42.49	\$27.99

*Non-stock Allow 2 weeks for delivery



Product Features

- Renews grout color
- Enhanced stain resistance
- Change grout color
- Easy to apply
- Available in 35 colors

Where to Use

- Interior and exterior
- Floors and walls
- Residential and commercial

COVERAGE:

1/4 in 12x12 tile is 300 sq ft of tile

1/2 in 12x12 tile is 250 sq ft of tile

EzPoxy™ EzClean™

100% Solids Epoxy Mortar & Grout

Bostik EzPoxy™ EzClean™ is a 100% Solids Epoxy Mortar & Grout with outstanding application and clean up properties, in addition to superior chemical resistance.

UNIT/WT	RETAIL	WHSL.
Part A & B Resin Kit (59.9 oz)	\$139.49	\$92.99
EZ Clean Sand/Colorant*	\$41.39	\$27.59
*stock char black only		



Substrates

Concrete
Structurally sound, exterior grade plywood (interior/dry use only)
Cement backer board
Bostik GoldPlus™
Ultra-Set® Advanced
Black-Top™
Existing ceramic tile

Materials

Ceramic
Quarry
Porcelain
Granite
Slate
Pre-cast terrazzo
Dimensional and moisture sensitive tiles

1900™

Epoxy Modified Grout & Mortar Admixture

Bostik® 1900™ Epoxy Modified Grout and Mortar Admixture, when mixed with Bostik Hydroment® Ceramic Tile Grout™ Sanded, is for interior and exterior installations to set and/or grout all ceramic, porcelain, quarry, granite, slate, marble, limestone, and dimension stone tiles. Exceeds ANSI A118.8.

SIZE	RETAIL	WHOLESALE
9 lb bucket	\$82.65	\$55.09

Where to Use

Interior or exterior

Commercial or residential kitchens

Countertops and back splashes

Restaurants

Bathrooms

Malls

Concourses

Service garages

Food processing or packaging plants

Anywhere stain and chemical resistance or superior shear/bond strengths are required



Substrates

Plywood

Vinyl/VCT

Ceramic

Materials

Ceramic

Porcelain

Quarry

Granite

Slate

Marble

Dimensional stones

Pre-cast terrazzo

425™

Multi-Purpose Acrylic Latex Admixture

Bostik 425™ multi-purpose acrylic latex admixture is a high solids acrylic emulsion designed to improve the performance of grout, thinsets, and patches.


SIZE	UNITS/ PALLET	RETAIL	WHSL.
1 GAL	144	\$29.69	\$19.79

Where to Use

- Interior and exterior floors
- Interior and exterior walls

Substrates

- Plywood sub-floors
- Porcelain tiles
- Gypsum board
- Cementitious backer boards
- Waterproofing membranes
- Crack isolation membranes



For Installation of:

- Ceramic
- Glazed wall tile
- Quarry
- Mortar, grout and patch admixture
- Improved water resistance
- Improved freeze/thaw resistance

MULTI-PURPOSE™

Floor & Wall Mastic

Bostik Multi-Purpose™ Mastic is a high performance adhesive for the interior installation of most types of ceramic and stone tile (except moisture sensitive marble). Bostik Multi-Purpose™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles. Bostik Multi-Purpose™ Mastic exceeds the requirements of ANSI A136.1 Type I and II.

UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.	WHSL/ PLT
3.5 gal white	48	\$54.59	\$36.39	\$30.99

SUBSTATES:

Gypsum wall board
 Exterior grade plywood (floors only)
 Gypsum Plaster
 Concrete
 Cement block
 Masonry wall
 Existing ceramic tile
 Cement backerboard
 Ultra-Set Advanced
 Black Top
 Gold Plus



Coverage

4 1/4x 4 1/4 wall tile	3/16x5/32 v-notch	45-50 s/f per gal
4x4 & 4x8 glazed wall tile	3/16 x 5/32 v-notch	45-50 s/f per gal
Ceramic mosaics	3/16 x 5/32 v-notch	45-50 s/f per gal
Large unit tiles	1/4 x1/4 x 1/4 sq notch	25-30 s/f per gal

D-2001® ULTRA-PREMIUM™

Superior Performance Ceramic Tile Mastic

Bostik D-2001® Ultra-Premium™ Mastic is a high performance adhesive for the interior installation of all types of ceramic and stone tile (except moisture sensitive marble). Bostik D-2001® Ultra-Premium™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles. Bostik D-2001® Ultra-Premium™ Mastic exceeds the requirements of ANSI A136.1 Type I and II.

UNIT/WT	UNITS/ CASE	RETAIL	WHSL.
1 GALLON	4	\$29.69	\$19.79



Where to Use

Interior floors

Interior walls

Substrates

Gypsum wallboard

Exterior grade plywood (floors only)

Gypsum plaster

Concrete

Cement block

Masonry walls

Existing ceramic tile

Cement backer board

Bostik Ultra-Set® Advanced

Bostik Black-Top™

Bostik GoldPlus™

Materials

Ceramic tile

Stone tile (except moisture-sensitive marble)

Coverage Chart		
Tile Size	Trowel Size	Coverage
4 1/4" x 4 1/4" wall tile	3/16" x 5/32" v-notch	45-50 sq/ft per gallon
4" x 4" & 4" x 8" glazed wall tile	3/16" x 5/32" v-notch	45-50 sq/ft per gallon
Ceramic mosaics	3/16" x 5/32" v-notch	45-50 sq/ft per gallon
Large unit tiles	1/4" x 1/4" x 1/4" square notch	25-30 sq/ft per gallon

GoldPlus™

Latex Waterproofing and Anti-Fracture Membrane

GoldPlus™ is a ready-to-use, roller-applied, latex waterproofing and anti-fracture membrane for use beneath thin set ceramic tile installations on vertical and horizontal surfaces. GoldPlus™ exceeds the requirements of ANSI A118.10 (specification for waterproofing membranes beneath thin set tile and stone) and ANSI A118.12 specification for crack isolation membranes.

Use GoldPlus™ in commercial or residential applications. Apply over concrete, cement block walls, cement backer board, exterior grade plywood (interior, dry installations only) and mortar beds.

Use to prevent tile cracking caused by the shrinkage of new concrete slabs and to prevent cracks up to 1/8" from transferring through tile or stone. Use GoldPlus™ to waterproof showers, lavatories, fountains, commercial kitchens and restaurants, etc.

GoldPlus™ contains Bostik's Blockade® antimicrobial protection which helps protect against the growth of bacteria, mold and mildew and enables it to offer resistance to stains caused by mold.

UNIT/WT	UNITS/ PALLET	RETAIL	WHSL.
3.5 gal	27	\$239.09	\$159.39
1 gal	4gal/case	\$76.35	\$50.89

WHERE TO USE

Interior/exterior floors and walls.

COVERAGE

45 ft²/gallon with a thickness of 30 mil wet/20 mil dry GoldPlus™ layer. Coverage will vary depending on the roughness of the substrate.



Bosti-Set™

Thin porcelain tile panel adhesive and sound reduction membrane

Bostik Bosti-Set™ is a non-sag, easy to trowel adhesive that is specifically formulated for the installation of thin porcelain tile panels.

UNIT/WT	RETAIL	WHSL.
4 gal	\$448.50	\$299.00

SUBSTRATES:

Drywall
Masonry
Roller-applied acrylic waterproofing
membranes & sheet membranes
Well-bonded clean ceramic tile
Exterior grade plywood
Steel
Aluminum
Stone
Coated Metals
Epoxy
Concrete
Cement board



ADVANTAGES TO THE CONTRACTOR:

Cuts installation time nearly in half, with half the crew!
Trowel on to panel only, no combing on to walls
Adheres to a wide range of substrates without primer
Schedule more jobs
Adjustable for up to 30 minutes
80% less weight than mortar to stage
No water or mixing
No equipment, cords or hoses for mixing
Longer working time than typical thin sets
Exceptional instant grab makes it safer working at greater heights
Less weight than mortar
Easy adhesive clean up, even after the cure
Easy panel replacement
Install over clean tile with no primer

TYPICAL 5,000 SF WALL INSTALLATION		
	Typical Mortar	Bosti-Set™
Work days to Complete	10 days (4 man crew)	6 days(2 man crew)
Quantity needed	258 - 50lb bags	65 - 4 gallon pails
Total weight	15,849 lbs	3,325 lbs
Water needed	360 gal	5 gal (wall wipe only)
Electricity	369.79 kWh	0 kWh

Pro-Cure™

MOISTURE-CURE URETHANE ADHESIVE

Bostik Pro-Cure™ is a professional grade, moisture-cure urethane adhesive for wood flooring, this adhesive does NOT contain any water.

UNIT/WT	RETAIL	WHSL.	PALLET
4 gal	\$147.45	\$98.29	\$83.59

SUBSTRATES:

Concrete
Plywood
OSB (underlayment grade)
Well bonded Ceramic tile
Cement backerboard
Gypsum patch
Cement patch
Radiant heat flooring
Terazzo

MATERIALS:

Engineered
Acrylic impregnated
Solid plank flat milled
Shorts
Bamboo & Parquet hardwood



Coverage

≤1/2" Engineered Hardwood	3/16x5/32 v-notch	45-50 s/f per gal
Finger Block Parquet	1/8"x1/8"x1/8" sq notch	70-80 s/f per gal
Flooring & 3/4" Parquet	1/4"x1/4"x1/8" sq notch	35-45 s/f per gal
>1/2" Flat Milled Solid & Shorts or Plywood	1/4 x1/4 x 1/4 sq notch	30-40 s/f per gal

GREENFORCE™

Advanced Tri-Linking™ Adhesive And Moisture Control Membrane

Bostik GreenForce™ is a high performance hardwood flooring adhesive and moisture control membrane that maintains the superior long term durability and moisture protection properties of high-end urethane adhesives but is easier to spread and clean even after full cure.

UNIT/WT	RETAIL	WHSL.	WHSL
quantiy	any	1-10	11+
4 gal	\$262.35	\$174.89	\$148.69

Where to Use

Residential
 Offices/light commercial
 Heavy commercial
 Offices
 Hospital

Substrates

Concrete
 Plywood
 OSB
 Well-bonded vinyl
 Terrazzo
 Ceramic tile
 Cement backer board
 Gypsum underlayments (dry, above-grade)
 Cement patch/underlayments

Materials

Solid hardwood
 Engineered hardwood
 Bamboo
 Cork
 Parquet
 Plywood
 Ceramic tile, marble, and stone inlays (residential or light commercial only)



Adhesive & Moisture Membrane Installation Method		Adhesive only Installation Method	
1/4 x 1/4 V-Notch	Coverage: 30-35 s/f	3/16 x 5/32 V-Notch	Coverage: 50 s/f
1/4 x 1/4 x 1/4 Square Notch	Coverage: 30-35 s/f	1/8 x 1/8 x 1/8 Square Notch	Coverage: 80 s/f
1/2 x 15/32 V-Notch	Coverage: 20 s/f	1/4 x 1/4 x 1/8 Square Notch	Coverage: 40 s/f
1/4 x 3/8 x 1/4 Square Notch	Coverage: 20 s/f	1/4 x 1/4 x 1/4 Square Notch	Coverage: 35 s/f

Pro-MSP™

HARDWOOD ADHESIVE WITH MOISTURE VAPOR PROTECTION

Pro-MSP™ is a hardwood and bamboo adhesive and moisture control membrane all in one. This adhesive formulation maintains long term durability and moisture control properties, and it is easy to spread and clean off of prefinished flooring before and after cure. This adhesive has low VOC's (as measured per EPA Method 24) and does NOT contain any water.

UNIT/WT	RETAIL	WHSL	WHSL
quantity	any	1-35	36+ (pallet)
4 gal	\$177.44	\$118.29	\$99.99



KEY FEATURES

- Easy spread & clean
- Subfloor moisture protection
- Low odor & VOC

ADHESIVE & MOISTURE MEMBRANE INSTALLATION METHOD

Flooring Type	Recommended Trowel Size	Coverage
Engineered wood flooring up to 5/8" thick	1/4"x1/4" V-Notch Trowel	30-35sf/gallon
	1/4"x1/4"x1/4" Square Notch Trowel	30-35sf/gallon
Engineered wood flooring >5/8" thick	1/2"x15/32" V-Notch	20sf/gallon
	1/4"x3/8"x1/4" Square Notch	20sf/gallon
Adhesive Only Installation Method		
Flooring Type	Recommended Trowel Size	Coverage
Engineered Hardwood ≤ 1/2"	3/16"x5/32" V-Notch	50sf/gallon
≤ Parquet, or cork underlayment	1/8"x1/8"x1/8" Square Notch	80sf/gallon
Engineered hardwood flooring >1/2" thick, solid wood or bamboo flooring ≤ 3/4" thick, and parquet ≤ 3/4" thick	1/4"x1/4"x1/8" Square Notch	40sf/gallon
Solid wood or bamboo flooring > 1/2" thick	1/4"x1/4"x1/4" Square Notch Trowel	35sf/gallon

PTG-8030

Resilient Adhesive

PTG-8030 is a solvent-free adhesive with extremely aggressive tack. PTG-8030 contains an antimicrobial system for enhanced resistance to mold and mildew. When used with LVT, plank and vinyl sheet flooring, PTG-8030 provides a tenacious, permanent bond. When used with carpet tiles in a dry install, this adhesive is formulated for releasing and re-bonding while permanently retaining its tack, allowing individual tiles to be lifted out easily and replaced without substantial loss of adhesive properties.

UNIT/WT	RETAIL	WHSL.	PALLET
4 gal	\$139.99	\$92.99	\$81.99
1 gal	\$37.19	\$24.79	

Coverage Chart		
Flooring	Trowel Size	Coverage per gallon
Modular Carpet Tile Carpet Cushion	1/16" x 1/32" x 1/32" U-Notch Trowel	220-260sf
	Flat Trowel	350-400sf
	3/8" Nap Roller	350-400sf
LVP, LVT, and Sheet	1/16" x 1/32" x 1/32" U-Notch Trowel	220-260sf



WOOD ADHESIVES

DriTac 6200	DriTac 6200 Pressure Sensitive Wood Flooring Adhesive				
	DriTac 6200 Premium Pressure Sensitive Wood Flooring Adhesive is the product of choice for professional wood and cork flooring installations. After years of successful use, flooring contractors, installers, and architects continue to find DriTac 6200 Premium Pressure Sensitive Wood Flooring Adhesive has the superior tack, excellent bond strength and long open time ideally suited to commercial, residential and institutional applications.				
	Flooring Types			Recommended Trowel TR-2	
	Multi-Ply Engineered Plank	Acrylic Impregnated Multi-Ply Engineered Plank	Cork Tile		
	Foam-Backed Parquet	Acrylic Impregnated Plain-Back Parquet	Cork Underlayment		
	Plain-Back Parquet				
				Pricing	
		Retail	Wholesale	11-35 buckets	36/pallet
4 gal.	\$216.00	\$108.00	\$104.00	\$97.00	
1 gal	\$72.00	\$36.00			
DriTac 7300	DriTac 7300 SureBond Urethane Wood Flooring Adhesive				
	DriTac 7300 is easy to spread and easy to clean up when wet. DriTac 7300 provides a permanent bond and allows installers increase their productivity with its easy spread and easy clean formula. DriTac 7300 is non-slumping, low in odor and offers superior coverage and excellent ultimate bond strength.				
	Flooring Types		Recommended Trowel TR-6 or TR-7		
	Bamboo	Solid Wood Planks			
	Exotic Woods	Acrylic Impregnated Wood			
	Multi-Ply Engineered Plank	Parquet			
		Plywood			
			Pricing		
	Retail	Wholesale	11-35 buckets	36/pallet	
4 gal	\$198.00	\$99.00	\$96.00	\$89.00	
DriTac 7400	DriTac 7400 Easy Spread Urethane Wood Flooring Adhesive				
	DriTac 7400 Easy Spread is a moisture cured urethane wood flooring adhesive that that is easy to spread and clean up when wet. This adhesive contains no water and offers a permanent bond with a non-slumping formula. DriTac 7400 Easy Spread is a wet-lay adhesive with low odor that helps contribute to LEED credits. This adhesive is recommended for residential and commercial applications.				
	Flooring Types		Recommended Trowel TR-6 or TR-7		
	Bamboo	Solid Wood Planks			
	Exotic Woods	Acrylic Impregnated Wood			
	Multi-Ply Engineered Plank	Parquet			
		Plywood			
			Pricing		
	Retail	Wholesale	11-35 buckets	36/pallet	
4 gal	\$266.00	\$133.00	\$129.00	\$120.00	
DriTac 9100	DriTac 9100 Contractors Choice High Solids Wood Flooring Adhesive				
	DriTac 9100 Contractors Choice High Solids Wood Flooring Adhesive is a Polymeric Resin that has been formulated for wet-lay installations. DriTac 9100 Contractors Choice is a professional grade adhesive that spreads easily and cleans up with a damp rag. Installers must lay wood into the adhesive immediately after troweling the adhesive. DriTac 9100 Contractors Choice has low VOC content, is fast grabbing and low in odor.				
	Flooring Types		Recommended Trowel TR-2		
	Multi-Ply Engineered Plank	Acrylic Impregnated Multi-Ply Engineered Plank			
	Plain-Back Parquet	Acrylic Impregnated Plain-Back Parquet			
	3/4" Solid Shorts	Parquet			
			Pricing		
		Retail	Wholesale	11-35 buckets	36/pallet
4 gal	\$160.00	\$80.00	\$78.00	\$73.00	



DriTac MCS 7000	DriTac MCS 7000 'Green' Concrete Moisture Control System			
	DriTac MCS 7000 Concrete Moisture Control System reduces the transmission rate of moisture vapor within any concrete subfloor (up to 12 lbs) to levels accepted by most wood flooring manufacturers. The DriTac System consists of a two component epoxy, which is mixed together to form a coating that is applied to the concrete subfloor. When used in conjunction with DriTac 7600, DriTac 7500 Eco-Urethane or <i>Easy Spread</i> DriTac 7400 Urethane Adhesives, DriTac MCS 7000 Concrete Moisture Control System is fully-warranted. It dries quickly and has low odor. DriTac MCS 7000 also helps reduce the potential for mold and mildew growth caused by subfloor moisture.			
	Pricing			Coverage
		Retail	Wholesale	
	1.8 gallon	\$574.00	\$287.00	300 - 350 s/f



Dritac Wood/Vinyl Tools

TROWELS	Floor Type	DriTac Trowel	Coverage	Retail	Wholesale
	Multi-Ply Engineered Plank (up to 5 inches wide)	TR-2 3/16" x 1/4" x 1/2" V notch 60 sq. ft./gal. spread rate	60 sq. ft./gal.	\$38.00	\$17.00
	Multi-ply engineered plank 3/8" up to 1/2" and 5/16" to 3/8" solid strip	TR-6 3/16" x 3/16" x 5/32" V notch 50 sq. ft./gal. spread rate	50 sq. ft./gal.	\$38.00	\$17.00
	Greater than 1/2" engineered plank, 3/4" parquet and solid plank greater than 3/8" up to 1/2"	TR-7 1/4" x 1/4" x 1/8" Square notch 35 sq. ft./gal. spread rate	35 sq. ft./gal.	\$38.00	\$17.00
	Vinyl Tile & Vinyl Plank over porous substrates	TR-8 1/16" x 1/16" x 1/16" Square notch 200 sf/gal spread rate	200 sq. ft./gal	\$38.00	\$17.00
	Vinyl Tile & Vinyl Plank over non-porous substrates	TR-13 1/16" x 1/32" x 1/32" U Notch 300 sf/gal spread rate	300 sq.ft./gal	\$38.00	\$17.00

Description	Retail	Wholesale
Urethane Adhesive Remover Liquid	\$41.98	\$20.99
Urethane Adhesive Remover Wipes	\$37.98	\$18.99
Engineered Repair Kits	\$119.98	\$59.99
Repair Adhesive - Gallon	\$154.58	\$77.29
Repair Adhesive - Quart	\$46.18	\$23.09
RS-10 Replenish pack for Engineered Repair Kit - Syringe & Applicator Tip	\$23.98	\$11.99